


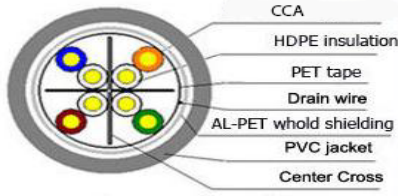

CAT6 FTP cable PNI F06

305 m reel

Product Specification

PRODUCT & SPEC.			CONFIGURATION	
INSIDE			4PRS	
CONDUCTOR	CONFIGURATION	4X2X0.5MM±0.01	 CAT6 4-pair FTP LAN Cable	
	MATERIAL	CCA MATERIAL		
	WORK DATAPASS	110~120M		
INSULATION	MATERIAL	HDPE		
	PE OD	0.92MM-0.95MM		
PAIRED PITCH	BLUE/BLE&WHITE	12MM		
	ORANGE /ORANGE &WHITE	14MM		
	GREEN/GREEN&WHITE	16MM		
	BROWN/BROWN&WHITE	18MM		
FOIL	MATERIAL	ALUMINUM	A.Orange/Orange&White	
	PACKAGE	305M/BOX	B. Blue/Blue&White	
		/	C.Brown/Brown&White	
CROSS CENTER	PE	4.8MM	D.Green/Green&White	
SKIN	MATERIAL	NEW PVC	INSIDE CABLE SEQUENCE: BLUE/BLE&WHITE,ORANGE/ORANGE&WHITE,GREEN/GR EEN&WHITE,BROWN/BROWN&WHITE	
	COLOR	AS CUSTOMERS		
	PVC OD	5.2MM-5.3MM		
	PVC THICKNESS	0.52MM-0.58MM		
	SERFACE	SMOOTH		
PERFORMANCE	CONDUCTOR RESISTANCEΩ/100M.20℃	≤65Ω		
	CONDUCTOR ALLOW LOAD CURRENT(A)	0.5A		
	VOLTAGE RATING(V)	≤30V		
	OPERATING TEMPERATURE(℃)	≤75℃		

EU Simplified Declaration of Conformity


SC ONLINESHOP SRL declares that **CAT6 FTP cable PNI F06** complies with the Directive ROHS 2011/65/EU. The full text of the EU declaration of conformity is available at the following Internet address:
<https://www.mypni.eu/products/5735/download/certifications>



Cablu FTP CAT6 PNI F06

Rola 305 m

Specificatii tehnice

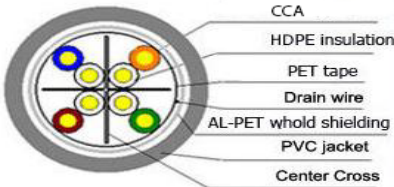PRODUS & SPECIFICATII			23AWG CAT6 FTP	CONFIGURATIE CAT6 4-pair FTP LAN Cable  
INTERIOR			4PRS	
CONDUCTOR	CONFIGURATIE	4X2X0.5MM±0.01		
	MATERIAL	CCA		
	DISTANTA MAX.DE LUCRU	110~120M		
IZOLATIE	MATERIAL	HDPE		
	PE OD	0.92MM-0.95MM		
FIRE PERECHI	ALBASTRU/ ALB&ALBASTRU	12MM		
	PORTOCALIU/ PORTOCALIUI&ALB	14MM		
	VERDE/VERDE&ALB	16MM	A.Portocaliu/Portocaliu&Alb	
	MARO/MARO&ALB	18MM	B. Albastru/Albastru&Alb	
			C.Maró/Maró&Alb	
FOLIE	MATERIAL	Aluminiu		
	IMPACHETARE	rola 305m		
		/		
CENTRU CRUCE	PE	4.8MM	Secventa fire: Albastru/Albastru&Alb,Portocaliu/Portocaliu&Alb,Verde/ Verde&Alb,Maro/Maró&Alb	
INVELIS	MATERIAL	PVC NOU		
	CULOARE	GRI		
	PVC OD	5.2MM-5.3MM		
	GROSIME PVC	0.52MM-0.58MM		
	SUPRAFATA	NETED		
PERFORMANTA	REZISTENTA CONDUCTOR Ω/100M.20℃	≤65Ω		
	CURRENT DE INCARCARE CONDUCTOR (A)	0.5A		
	VOLTAJ ADMIS(V)	≤30V		
	TEMPERATURA DE FUNCTIONARE(℃)	≤75℃		

Declaratie UE de conformitate simplificata

SC ONLINESHOP SRL declara ca **Cablu FTP CAT6 PNI F06** este in conformitate cu Directiva ROHS 2011/65/EU. Textul integral al declaratiei UE de conformitate este disponibil la urmatoarea adresa de internet:
<https://www.mypni.eu/products/5735/download/certifications>