

感谢您使用芝杜 zidoo 旗下产品，您可以关注我们的社交平台账号，和我们一起交流与分享。

Thank you for choosing products of Zidoo. Friend us on WeChat or Weibo to communicate and share with us.



微信公众号 @ **zidoo**
WeChat Official Account



微博账号 @ 芝杜官方
Weibo Account



Facebook @ **zidoottv**



Twitter @ **zidoottv**

如需更多帮助，请访问芝杜 zidoo 官网的用户论坛进行咨询。

If you need more assists, please visit user forum of the official website of Zidoo for consultation.




官网网址 /Official website: www.zidoo.tv

Introduction to hardware of Z1000


Device interface

Zidoo Z1000 is equipped with audio input & output ports and data transmission port. Please refer to the descriptions in this manual.


1. Front

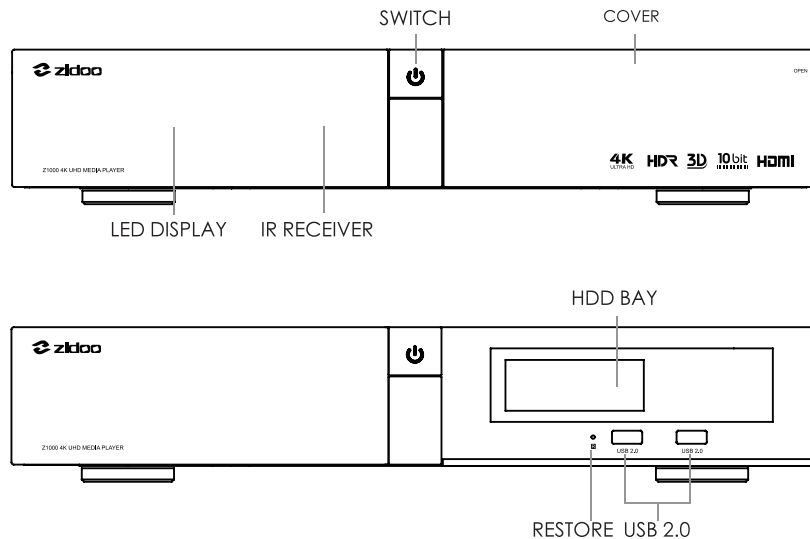


2. Left

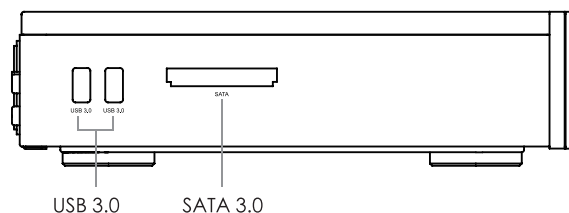

3. Right

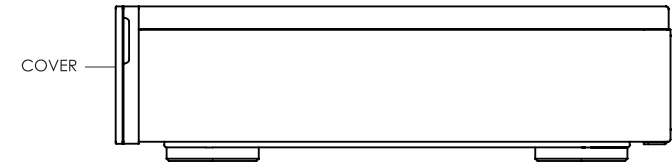

4. Back

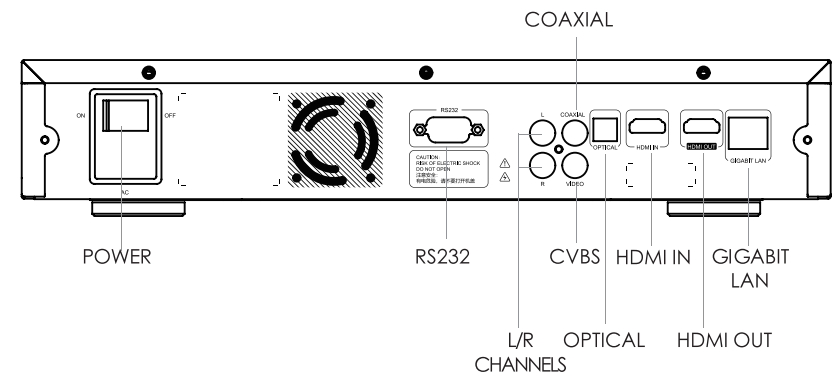


Note:

- *Please load/change the hard disk after turning off the power. If it is a brand-new hard disk, Please load it after formatting it.
- *Please prevent the orifice of the cooling fan from being blocked.
- *Do not touch any liquid in case the liquid runs into the inner part of the device and damage it.
- *Any maintenance personnel who are not appointed are not allowed to open the case.

Load The Hard Disk


Z1000 is equipped with hard disk storage of 3.5 inches and SATA high speed transmission port. The hard disk can be loaded by pushing in, with no other tools. (The maximum hard disk supports 10 TB)

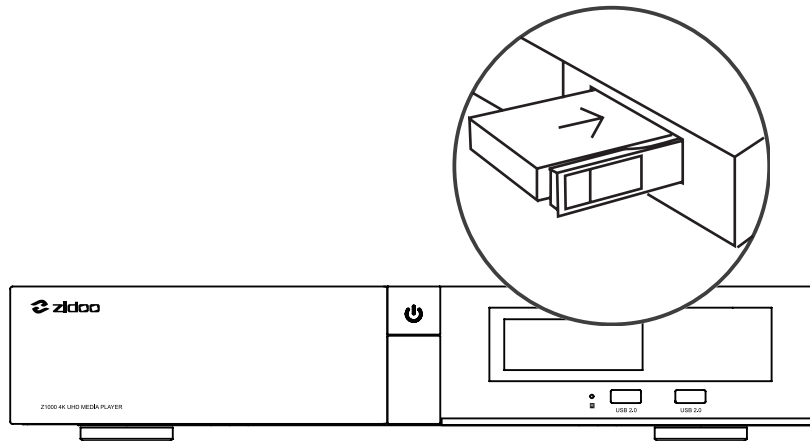

Note: Do not load or change the hard disk while the power is on to avoid that the device or the data of hard disk be damaged. If it is a brand-new hard disk, please format it before loading it to the device. This device support following formats of hard disk: EXT3, EXT4, NTFS, FAT32, EXFAT.

Remote Control

1. Button Features Description

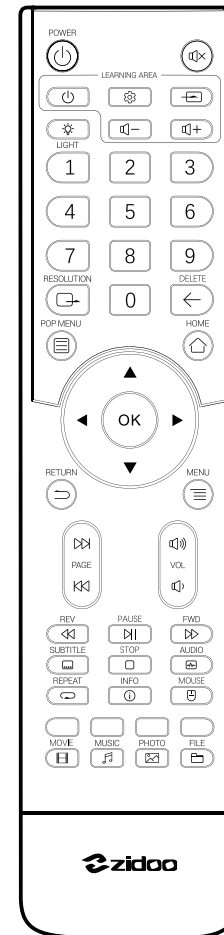


Functions	Buttons
Turn on/off	
TV Learning Area	
VOL+/VOL-/Mute	
Playback	
Mediainfo	
Pop Menu	
Page up/down	
Mouse	
Home	
Return	
Menu	
Resolution	
Light	
Delete	
Numbers	1/2/3/4/5/6/7/8/9/0
Multi-Function	
Shortcut	

2. Learning Button Introduction

Learning function: This remote control can copy functions of buttons from other remote control so that can control two devices.


Operation descriptions of Learning Button:

- 1) Point the top of this remote control to that of the remote control to be copied, align the infrared transmitting tubes.
- 2) Press  in the study area of this remote control until its white backlight is activated.
- 3) Press any button in the study area of this remote control, its white backlight flashes once.
- 4) Press the function button of the remote control to be copied. After the remote control receives the signal, the white backlight will quickly flash twice.
- 5) If there are many functions need to be learned, please repeat step 3 and 4.
- 6) After completing learning, press any buttons outside the learning area of this remote control to exit learning mode. Then the white backlight of this remote control will turn off automatically and completed learning.

Device Connection

1. HDMI connects to the TV


- 1) Cut off the power of the device. Please make sure the power of the TV and STB at OFFS Model.

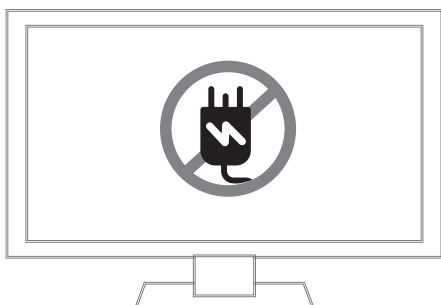


- 2) While the power of TV is turned off, insert one end of HDMI cable into HDMI OUT port and insert the other end into HDMI IN port.




- 3) Connect with the power. This device is equipped with suitable AC power adapter. Please connect the head of AC power adapter to the AC power input port of this device, then insert the plug of AC power line into the alternating current socket of 110V -240V.



- 4) Press the power button on the front panel of the machine or press the power button on remote control to turn it on. And turn on the TV.



- 5) Corresponding video source is selected by TV.

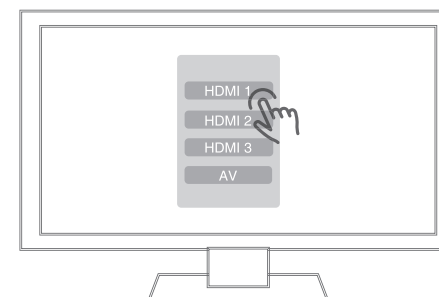

2. Connect AV cable with the TV

The connection method is same as connecting HDMI cable.

Z1000 Specification

Material	Aviation Aluminum Alloy
Front Display	LED
Shell	Aviation Aluminum Alloy
OS	Android + OpenWRT
CPU	Realtek RTD1296 ARM Cortex-A53 Quad-Core
GPU	ARM T820 MP3(3-Core)
Memory	2GB DDR
Internal Storage	16GB eMMC
WIFI Connectivity	802.11 AC MIMO Dual-Band WIFI
Ethernet	1*RJ-45 Ethernet Jack (10/100/1000Mbps)
HDMI Out	HDMI 2.0a, Support 4K@60fps, HDR10
HDMI In	HDMI 2.0
Video Decoder	HDR, 10-bit HEVC/H.265 up to 4K@60fp VP9 up to 4K@60fps, H.264 up to 4K@24fps
Audio Decoder	Support HD audio multichannel direct access and stereo decoding
HDD Bay	1*SATA 3.0
USB	2*USB 3.0, 2*USB 2.0
Input	100-240V ~ 50/60Hz Max 1.3A
Other interface	1*IR Receiver, 1*RCA Cvbs, 1*RCA Audio L/R Channels, 1*Coaxial, 1*SPDIF(2CH, 5.1CH), 1*RS232, 1*SATA 3.0

Initialization

Before actually using this device, you will be provided with this software for the first initialization. Please set your device according to the initialization process to obtain the optimum watching experience.


1. System Language

Select the language of the system as you want.




2. Screen Scaling

Adjust the screen display range using LEFT or RIGHT button of the remote control (Mouse Wheel) so that the image can be appropriately displayed on the screen of the TV.

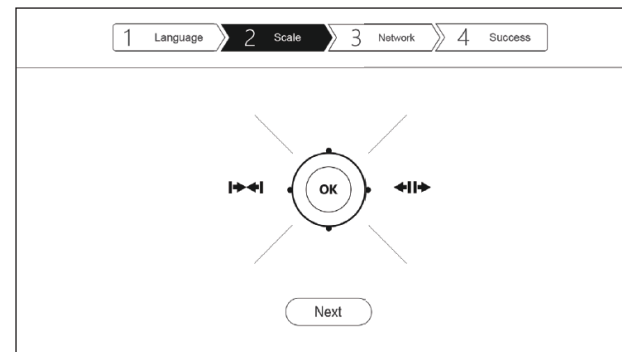


3. Network Setting

Set the configuration of the network so that the device can quickly connect with the network. The network is including WIFI network and Ethernet network. Select either of them and successfully connect with it.

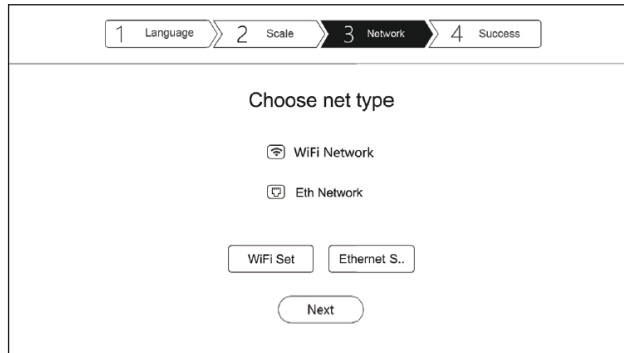

WIFI: Select SSID and enter password, connect to WIFI and finish setting.

Ethernet Network: No other operation needed except that inserting cable and then automatically connect to internet. After completed the Internet setting, please click "NEXT" to further steps and get to know the function of the Home Page and finish initialization.

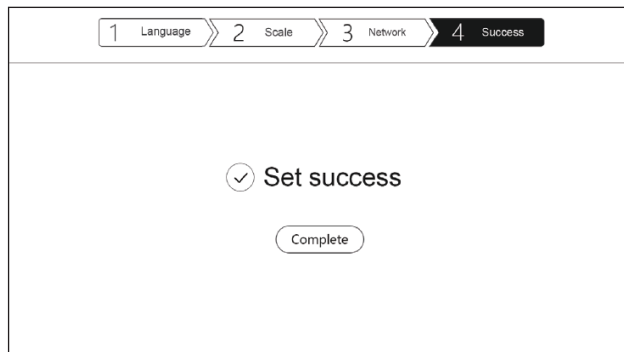


System update by OTA

Zidoo will update the firmware aperiodicity. Find the system update icon in APP center and open it; Support online network update and local update; After ticking "Automatically detect the latest version", you will receive the prompt for the latest firmware update automatically.




1. Online Update

Click "Online Update" to obtain information of online update.

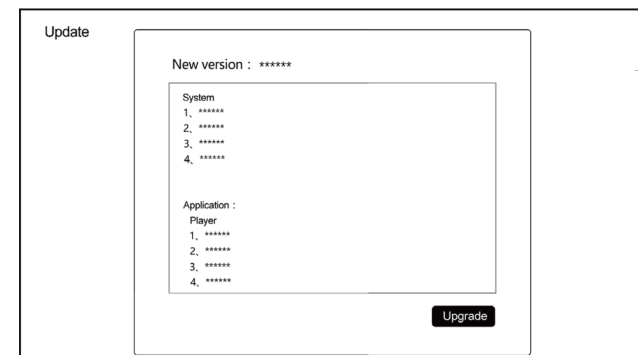


2. Local Update


Users can download the update files on the forum or official website and update firmware through files. Copy the downloaded update files to USB disk. Click "USB update" to select the update files.

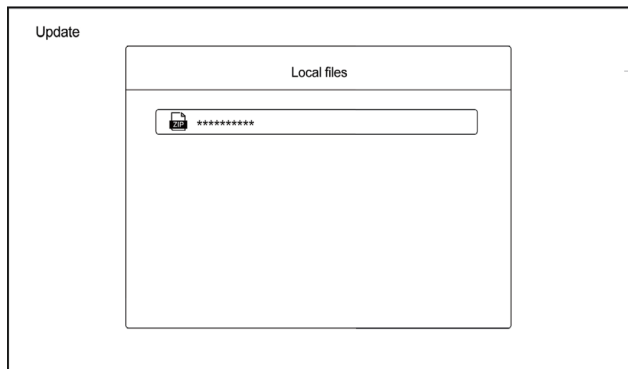


Download the update files by online update or local update. Click "Update" to update.

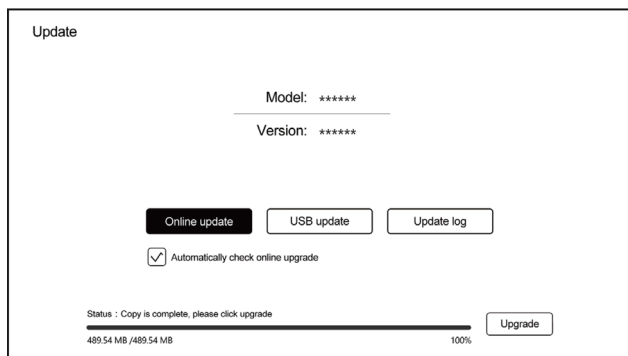

The system will automatically check the update files whether is complete or not.

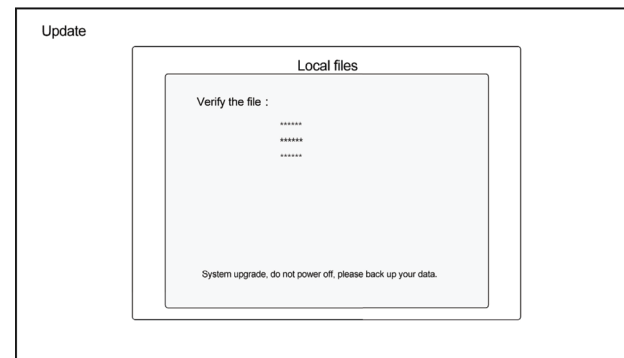

Note: Automatically access to system upgrade. Please don't power off in the progress.

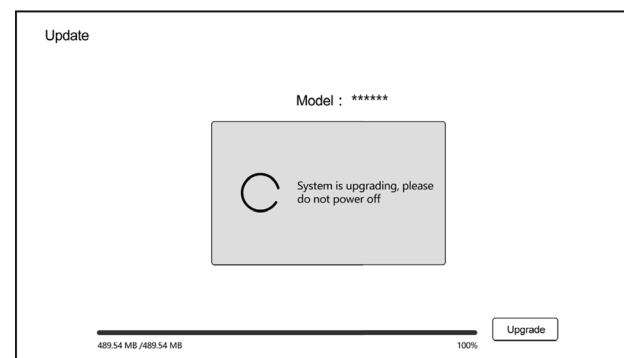

Once the update is completed, the system will automatically be restarted.



Special Note:

To guarantee user experience, Zidoo will update the firmware aperiodicity. Therefore, this manual may not be totally in line with the product.

Guarantee 保修卡

User File 用户信息

User name 用户姓名		Sex 性别	
Address 回寄地址			
Telephone 联系电话		Zip 邮编	
Commodity name and specification 产品名称		Model NO. 型号	
Fault description 故障说明			

Guarantee Item 保修条款

- (1) One year guarantee from date of purchased. (not including fittings)
- (2) All of damage by man-made(tear open the housing,tear off the sticker,unnormally using),or losing this card,we will not guarantee.
- (1) 保修期限：本产品遵循国家三包条例，商品存在非人为损坏所引起的硬件故障，本公司将提供一年保修服务（配件除外）。
- (2) 如需寄回本公司维修，请与此保修卡一同寄回。
- (3) 一切人为因素造成的损坏（包括擅自拆机，撕毁标签，自行刷机等等），本公司将不予保修。





