

# Manual de utilizare

## Adaptor Bluetooth PNI BT-DONGLE 8001

### **Introducere:**

Noul adaptor Bluetooth PNI BT-Dongle 8001 permite conectarea mai multor dispozitive Bluetooth (casti, smartphone, microfon) cu statia radio CB PNI Escort HP 8001L dotata cu mufa pentru accesoriu audio cu 2 pini tip Kenwood.

### **Procedura de imperechere BT-DONGLE 8001 cu microfonul BT-MIKE 8500:**



1. Cand statia radio este oprită, conectati adaptorul BT-DONGLE 8001. Porniti statia radio si asteptati ca adaptorul sa intre in modul de imperechere care se activeaza dupa circa 2 minute, cand ledul incepe sa clicheasca alternativ rosu si albastru.

2. Porniti microfonul BT-MIKE 8500 si activati modul de imperechere:

- Apasati lung tasta multifunctionala de pe microfon (tasta "M"). Veti auzi confirmarea vocala "Power on"
- Continuati sa tineti apasata tasta multifunctionala pana auziti mesajul "Pairing". Ledul va clichea alternativ rosu si albastru pana se va realiza conexiunea.
- Dupa ce s-a stabilit conexiunea, veti auzi mesajul "Connected". Ledul de pe microfon va clichea rar albastru.
- Apasati tasta PTT pentru a emite.

### **Procedura de imperechere BT-DONGLE 8001 cu BT-MIKE 8500 si telefonul mobil:**



## 1. Imperecheati BT-MIKE 8500 cu telefonul mobil:

- Porniti microfonul BT-MIKE si activati modul de imperechere: apasati lung tasta multifunctionala de pe microfon (tasta "M"). Veti auzi confirmarea vocala "Power on". Continuati sa tineti apasata tasta multifunctionala pana auziti mesajul "Pairing". Ledul va clipesti alternativ rosu si albastru pana se va realiza conexiunea.
- Activati functia Bluetooth pe telefonul mobil. Din lista dispozitivelor Bluetooth, selectati BT-MIKE 8500.
- Dupa ce s-a stabilit conexiunea, veti auzi mesajul "Connected". Ledul de pe microfon va clipesti rar albastru.

2. Inchideti BT-MIKE 8500. Tineti apasat lung tasta multifunctionala pana auziti mesajul "Power off".

3. Imperecheati BT-MIKE 8500 cu BT-DONGLE 8001 (urmatori pasii descriși la procedura anterioară)

4. Reconectati manual BT-MIKE 8500 la telefonul mobil

Acum toate cele 3 dispozitive: microfon, adaptor Bluetooth si telefon mobil sunt conectate.

Pentru a emite apasati tasta PTT.

Pentru a raspunde la telefon apasati scurt tasta "M".


## Procedura de imperechere BT-DONGLE cu castile Bluetooth BT-MIKE 7500:



1. Cand statia radio este oprită, conectati adaptorul BT-DONGLE 8001. Porniti statia radio si asteptati ca adaptorul sa intre in modul de imperechere care se activeaza dupa circa 2 minute, cand ledul incepe sa clipeasca alternativ rosu si albastru.

2. Porniti castile BT-MIKE 7500. Pentru a porni dispozitivul, impingeți în sus comutatorul de pe partea laterală. Indicatorul led clipește alternativ roșu și albastru, după care dispozitivul intră în modul de imperechere.
3. Dupa ce conexiunea dintre casti si adaptor a fost stabilita, ledul de pe ambele dispozitive clipește albastru.
4. Apasati tasta PTT de pe casca pentru a emite.

#### **Procedura de imperechere BT-DONGLE cu castile Bluetooth BT-MIKE 7500 si cu telefonul mobil:**

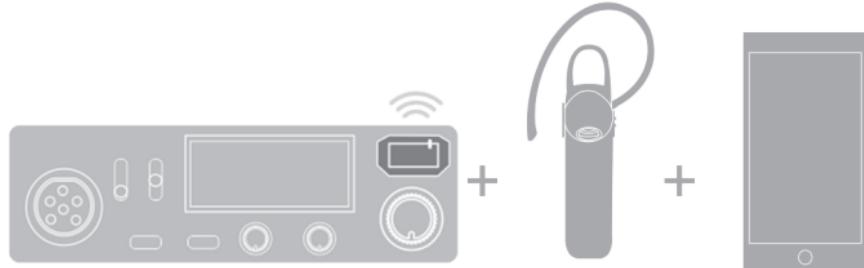

1. Imperecheati BT-MIKE 7500 cu telefonul mobil:
  - Porniti castile BT-MIKE 7500. Pentru a porni dispozitivul, impingeți în sus comutatorul de pe partea laterală. Indicatorul led clipește alternativ roșu și albastru, după care dispozitivul intră în modul de imperechere.
  - Porniti funcția Bluetooth pe telefonul mobil. Cautați dispozitivele Bluetooth și conectați-vă la BT-MIKE 7500.
2. Inchideți BT-MIKE 7500. Pentru a închide dispozitivul, impingeți în jos comutatorul de pe partea laterală.
3. Imperecheati BT-MIKE 7500 cu BT-DONGLE:
  - Cand statia radio este oprită, conectati adaptorul BT-DONGLE 8001. Porniti statia radio si asteptati ca adaptorul sa intre in modul de imperechere care se activeaza dupa circa 2 minute, cand ledul incepe sa clipeasca alternativ rosu si albastru.
  - Porniti castile BT-MIKE 7500. Pentru a porni dispozitivul, impingeți în sus comutatorul de pe partea laterală. Indicatorul led clipește alternativ roșu și albastru, după care dispozitivul intră în modul de imperechere.
  - Dupa ce conexiunea dintre casti si adaptor a fost stabilita, ledul de pe ambele dispozitive clipește albastru.

- Apasati tasta PTT de pe casca pentru a emite.

#### 4. Reconectati manual BT-MIKE 7500 la telefonul mobil.

Acum toate cele 3 dispozitive, adaptor Bluetooth, casca Bluetooth si telefon mobil sunt imperecheate.

Pentru a emite apasati tasta PTT de pe casca.

Pentru a raspunde la telefon, apasati scurt tasta de volum.

#### **Specificatii tehnice:**

- Bluetooth V3.0
- Frecventa: 2.4GHz
- Distanță comunicare: pana la 10 m
- Tip conector audio: 2 pini Kenwood
- Dimensiuni: 40 x 28 x 17 mm
- Greutate: 8g

# User manual

## Bluetooth adapter PNI BT-DONGLE 8001

### Introduction:

The new Bluetooth adapter PNI BT-Dongle 8001 allows you to connect multiple Bluetooth devices (headphones, smartphone, microphone) to CB transceiver PNI Escort HP 8001L equipped with 2 pin Kenwood plug.

### Pairing procedure between BT-DONGLE 8001 and BT-MIKE 8500:



1. Connect BT-DONGLE to the transceiver and wait for the adapter to activate pairing mode (after ~2 minutes). The led starts to flash alternatively red and blue.
2. Turn on BT-MIKE 8500 and activate pairing mode:

- Long press "M" multifunctional key
- The vocal menu will confirm "Power on"
- Continue pressing the "M" key until you hear the vocal warning "Pairing". The led will flash red and blue until the connection is established.
- Once the connection is established, you can hear the message "Connected". The led will flash blue.
- Press PTT button to transmit

### Pairing procedure between BT-DONGLE 8001, BT-MIKE 8500 and smartphone:



1. Pair BT-MIKE 8500 with your smartphone:

- Turn on BT-MIKE 8500 and activate pairing mode (follow the steps described to the previous procedure)

- Activate Bluetooth function on yours mart phone. From the list of Bluetooth devices, select BT-MIKE 8500
  - Once connection is established, you can hear the message “Connected”. The led on the microphone will flash blue
2. Turn off BT-MIKE 8500. Long press multifunctional key “M“ until you hear the message “Power off”
3. Pair BT-MIKE 8500 with BT-DONGLE (follow the steps described to the previous procedure)
4. Manually reconnect BT-MIKE 8500 to your smartphone

Now, all three devices: microphone, Bluetooth adapter and smartphone are connected.

To emit push PTT button. To answer the phone push once “M“ key.


#### **Pairing procedure between BT-DONGLE 8001 and BT-MIKE 7500 headset:**



1. When the transceiver is in off stare, connect BT-DONGLE 8001. Turn on the transceiver and wait for the adapter to enter the pairing mode that is activated after about 2 minutes when the LED starts blinking alternately red and blue.
2. Turn on BT-MIKE 7500. To turn on the device, pull up the switch on the side. The LED blinks alternately red and blue, signaling that the device has entered pairing mode.
3. Once the connection has been established, the LEDs flash blue in both devices.
4. Push PTT button on the headset to transmit.

*Note: For successful pairing, the distance between the transceiver and the headset must be no more than 1 m.*

## Pairing procedure between BT-DONGLE 8001, BT-MIKE 7500 and the smart phone:

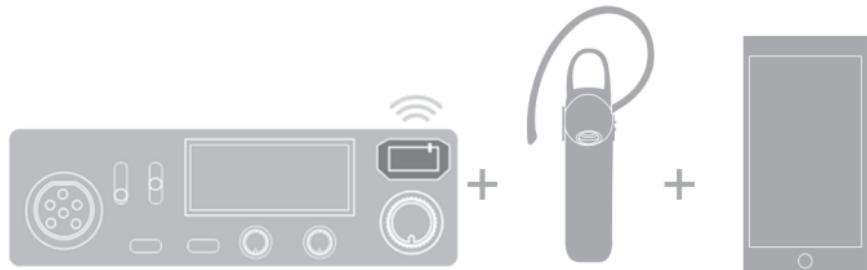

### 1. First pair BT-MIKE 7500 with the smart phone:

- Turn on BT-MIKE 7500. To turn on the device, pull up the switch on the side. The LED blinks alternately red and blue, signaling that the device has entered pairing mode.
- Turn on Bluetooth function on your smart phone. The the Bluetooth devices list search for BT-MIKE 7500.

### 2. Turn off BT-MIKE 7500. To turn off the device, pull down the switch on the side.

### 3. Pair BT-MIKE 7500 with BT-DONGLE 8001:

- When the transceiver is in off stare, connect BT-DONGLE 8001. Turn on the transceiver and wait for the adapter to enter the pairing mode that is activated after about 2 minutes when the LED starts blinking alternately red and blue.
- Turn on BT-MIKE 7500. To turn on the device, pull up the switch on the side. The LED blinks alternately red and blue, signaling that the device has entered pairing mode.
- Once the connection has been established, the LEDs flash blue in both devices.
- Push PTT button on the headset in order to transmit.

### 4. Reconnect manually BT-MIKE 7500 to the smartphone.

Now, all three devices: Bluetooth adapter, Bluetooth headset and smart phone are paired.

In order to transmit, push PTT button on the headset.

In order to answer the phone, shortly press volume button.

In order to set the volume, shortly press volume button. There are three volume levels.

### **Technical specifications:**

- Bluetooth V3.0
- Frequency: 2.4GHz
- Range: up to 10 m
- Connector type: 2 pins Kenwood
- Dimensions: 40 x 28 x 17 mm
- Weight: 8g